


Wiring Diagram
BPNCs (Back Plate Noise Canceling System) for STRAT® style guitars. SSS Rev4
 Bridge, Middle, Neck - SC pickups; RWRP Middle; Strat 5-way 4-pole super switch

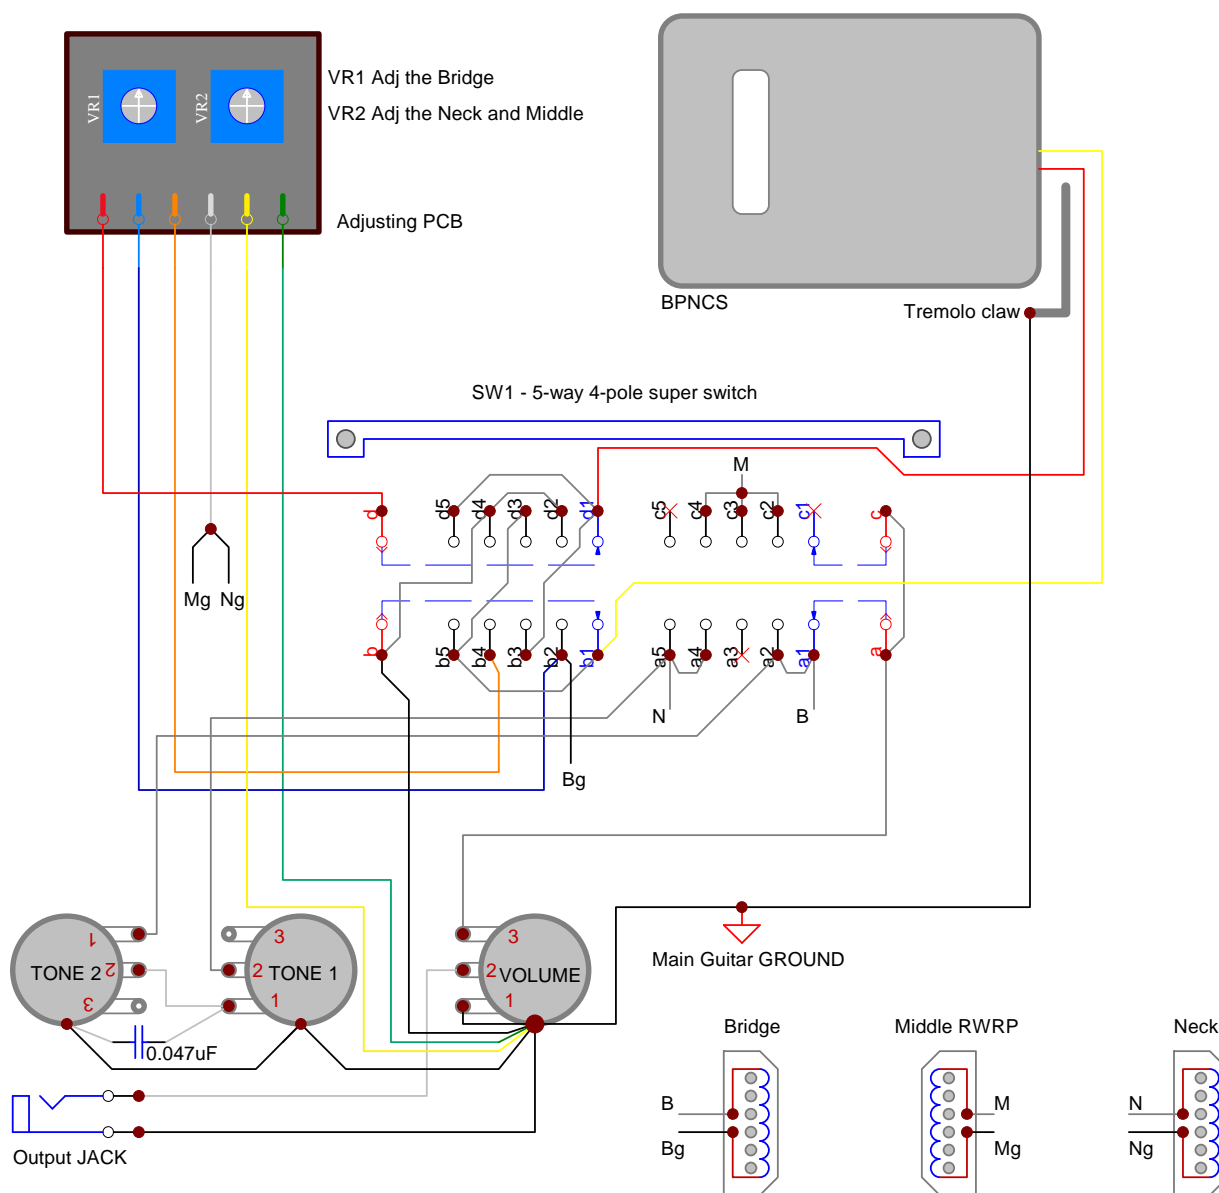

© ALL RIGHTS RESERVED ILITCH ELECTRONICS LLC

Notes:

***Disconnect (cut or unsolder) Bg, Mg and Ng from GROUND!**

1. Right two poles of the 5way super switch - for pickups switching
2. Left two poles of the 5way super switch - for BPNCs switching

Position 1- Bridge - Noise Canceling (NC) with the system
 Position 2- Bridge + Middle - NC with the RWRP Middle
 Position 3- Middle - NC with the system
 Position 4- Neck + Middle - NC with the RWRP Middle
 Position 5- Neck - NC with the system

TONE 1 and TONE 2 are permanently assigned to:
 TONE 1 to Neck; - Active for N and N+M
 TONE 2 to Bridge - Active for B and B+M
 NO Tone for Middle pickup Only

Works same way for BPNCs; PGNCS-S and LCNCS on Strat style guitar