


Wiring Diagram
 PGNCS-T3 (Pickguard Noise Canceling System) for TELE© style guitars Rev4
 Nashville Tele three Pickup configuration. 3 Single Coil pickups, RWRP MIDDLE, 5way 4pole Super switch

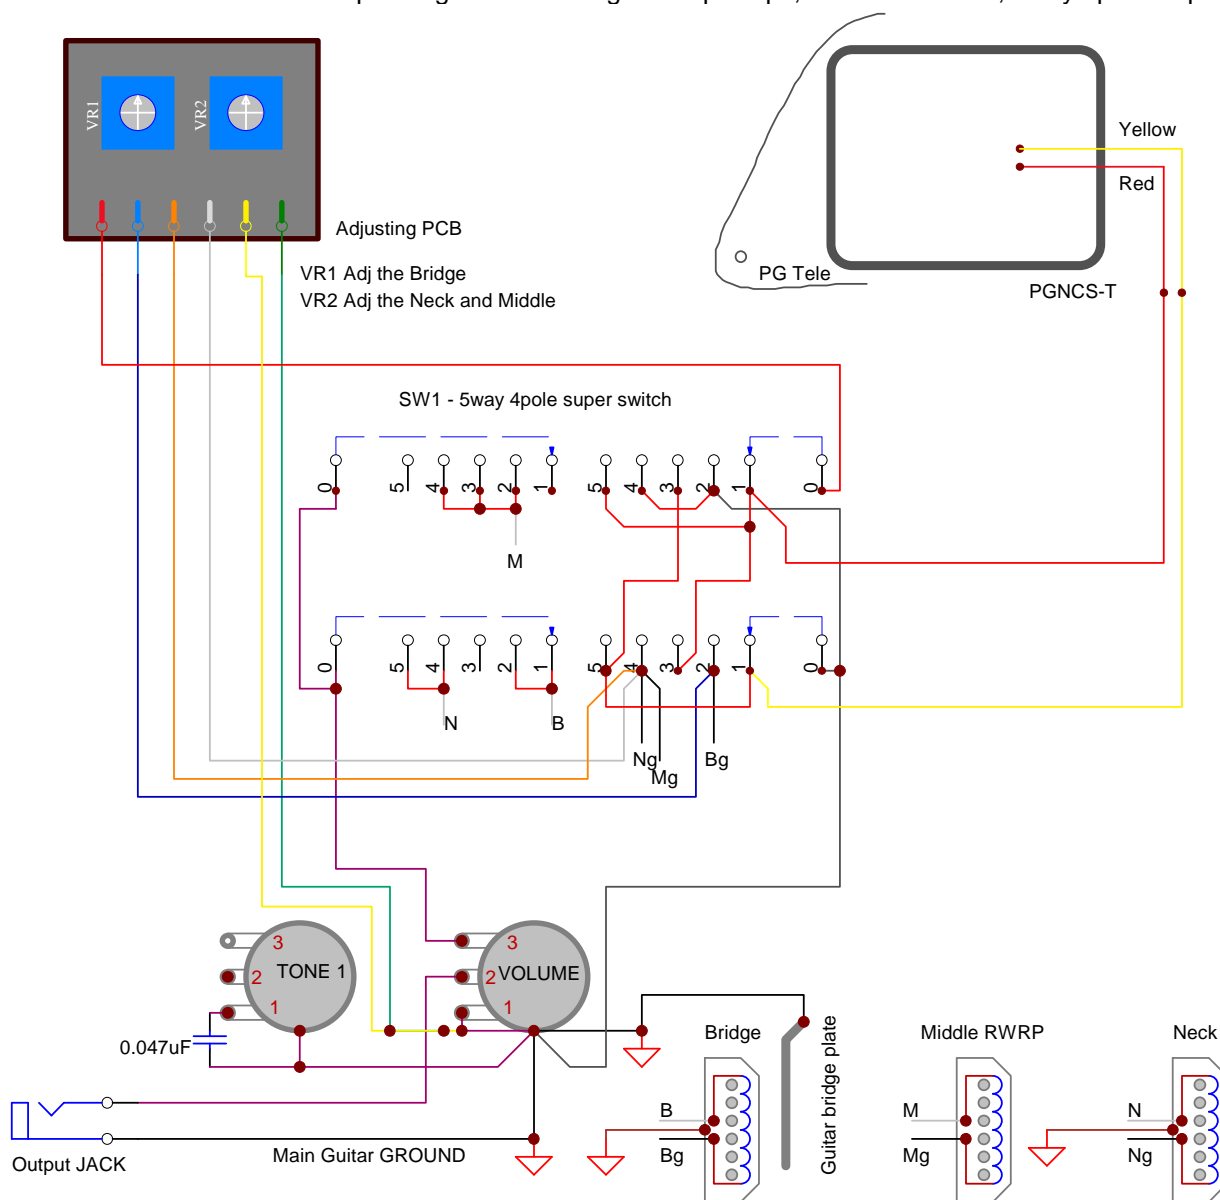

© ALL RIGHTS RESERVED ILITCH ELECTRONICS LLC

Notes:

***Disconnect (cut or unsolder) Ng, Bg, and Ng from GROUND!**

1. Left two poles of the 5way super switch - for pickups switching
2. Right two poles of the 5way super switch - for PGNCS T switching

Position 1 - Bridge - Noise Canceling (NC) with the system
 Position 2 - Bridge + Middle - NC with the RWRP Middle
 Position 3 - Bridge + Neck - NC with the system
 Position 4 - Neck + Middle - NC with the RWRP Middle
 Position 5 - Neck - NC with the system

Operations:

Position 1 - Bridge - no hum
 Position 2 - Bridge + Middle - no hum
 Position 3 - Middle - no hum
 Position 4 - Neck + Middle - no hum
 Position 5 - Neck - no hum